

ALMATEC PUMP CXM20

1/2" PLASTIC



**HOLLAND
AIR
PUMPS**
PRESSURE
TO PERFORM



MAX FLOW RATE: 20 LPM (5.3 GPM)

MAX PRESSURE: 7 BAR (100 PSI)

MAX DIAMETER SOLIDS: 2 mm (0.08")

MAX SUCTION LIFT CAPABILITY:

2 m (6.6') Dry. 8 m (26.2') Wet

WETTED HOUSINGS

Material

PE conductive

Ship Wt

1.8 kg (3.8 lbs)

NON-WETTED HOUSINGS

Description

Center Section

Air Valve

Material

PE conductive

PETP

ELASTOMER OPTIONS

Material

EPDM™

PTFE


NBR

Temperature limits

-51.1 (-60) to +137.8 (+280) °C (F°)

+4.4 (+40) to +104.4 (+220) °C (F°)

-12.2 (+10) to +82.2 (+180) °C (F°)

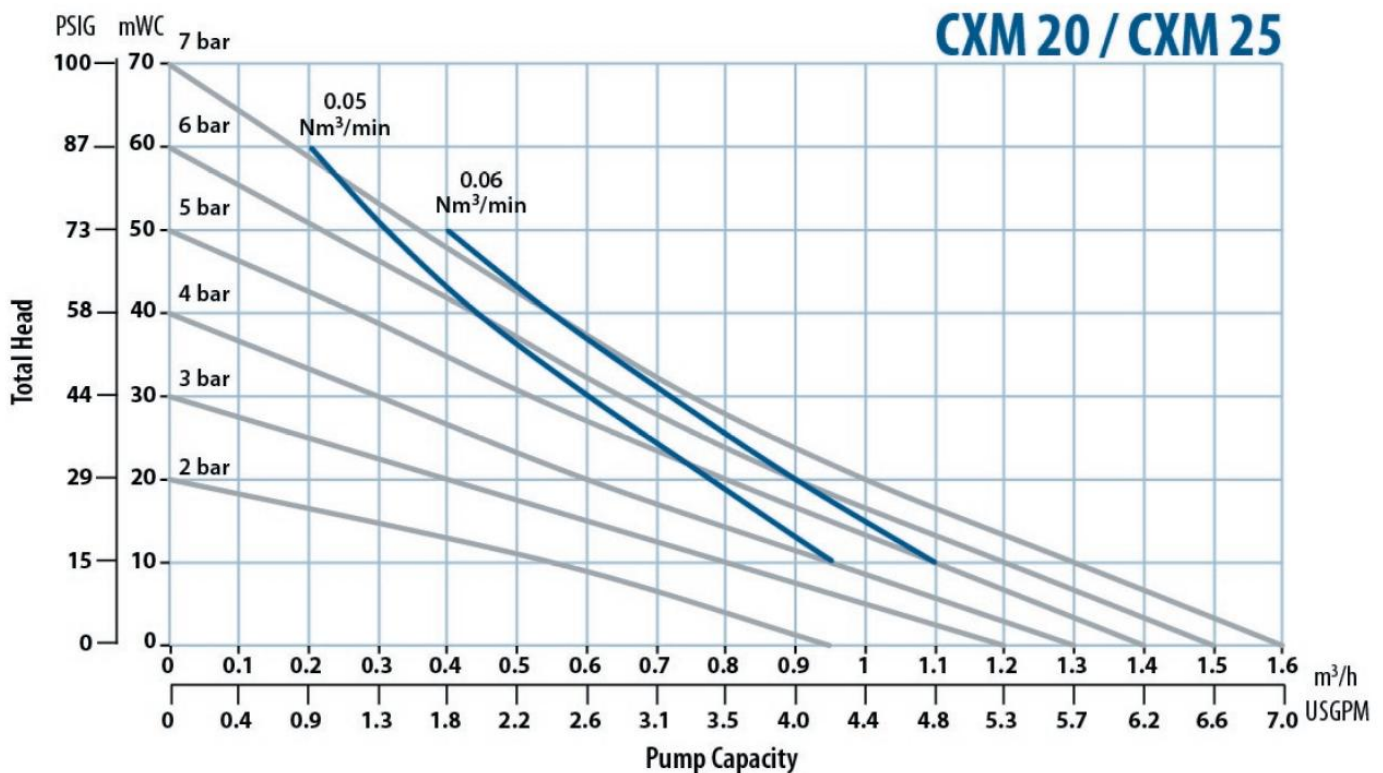

HOLLAND AIR PUMPS BV

De Scheper 260
NL 5688 HP OIRSCHOT
THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831