

ALMATEC PUMP CXM50

3/4" PLASTIC



**HOLLAND
AIR
PUMPS**

**PRESSURE
TO PERFORM**



MAX FLOW RATE: 50 LPM (13.2 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 3 mm (0.12")
MAX SUCTION LIFT CAPABILITY:
3.5 m (11.5') Dry, 9 m (29.5') Wet

WETTED HOUSINGS


Material	Ship Wt
PE conductive	4.7 kg (10.4 lbs)

NON-WETTED HOUSINGS

Description	Material
Center Section	PE conductive
Air Valve	PETP

ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

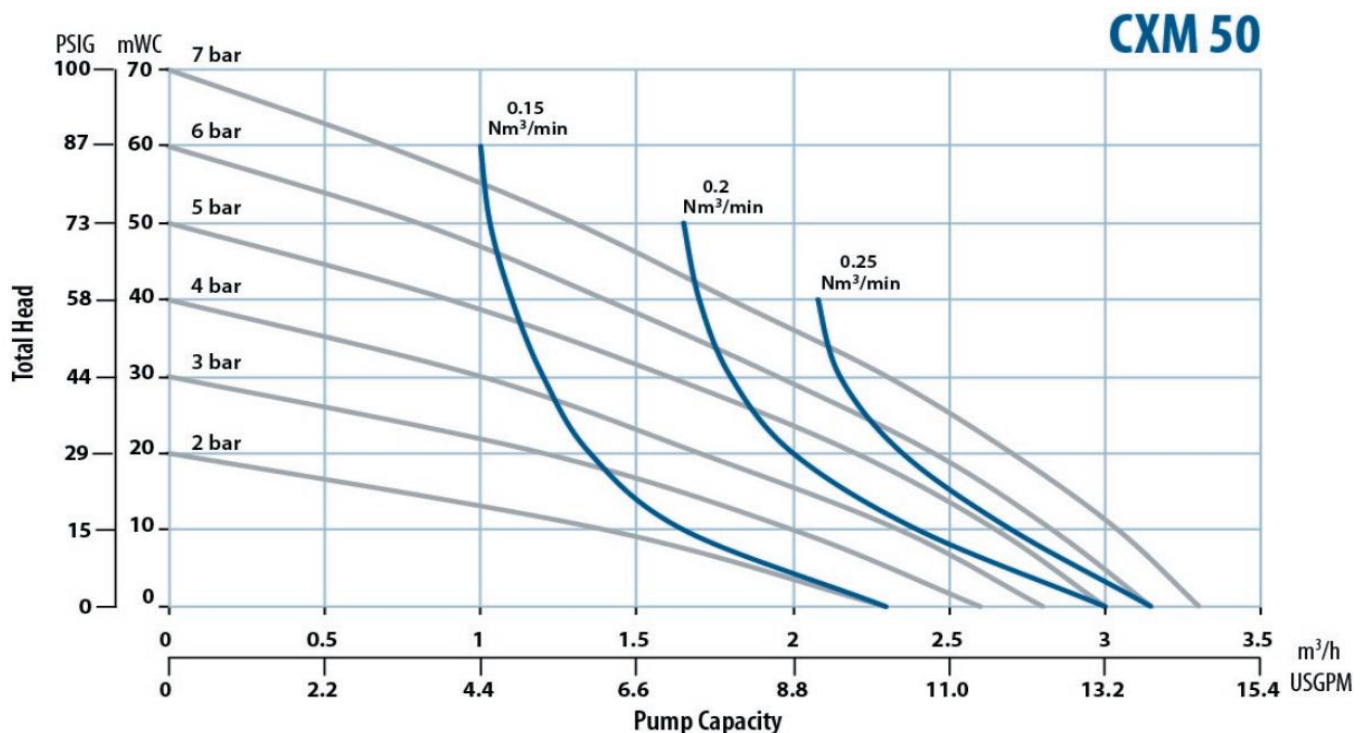

HOLLAND AIR PUMPS BV

De Scheper 260
NL 5688 HP OIRSCHOT
THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831