

ALMATEC PUMP AD32

1 1/4" METAL



MAX FLOW RATE: 150 LPM (39.6 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 12 mm (0.47")
MAX SUCTION LIFT CAPABILITY:
 2 m (6.6') Dry, 9 m (29.5 ') Wet

WETTED HOUSINGS


Material	Ship Wt
Stainless Steel 316	13 kg (28.6 lbs)
Stainless Steel polished	13 kg (28.6 lbs)

NON-WETTED HOUSINGS

Description	Material
Center Section	PA
Air Valve	PETP

ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

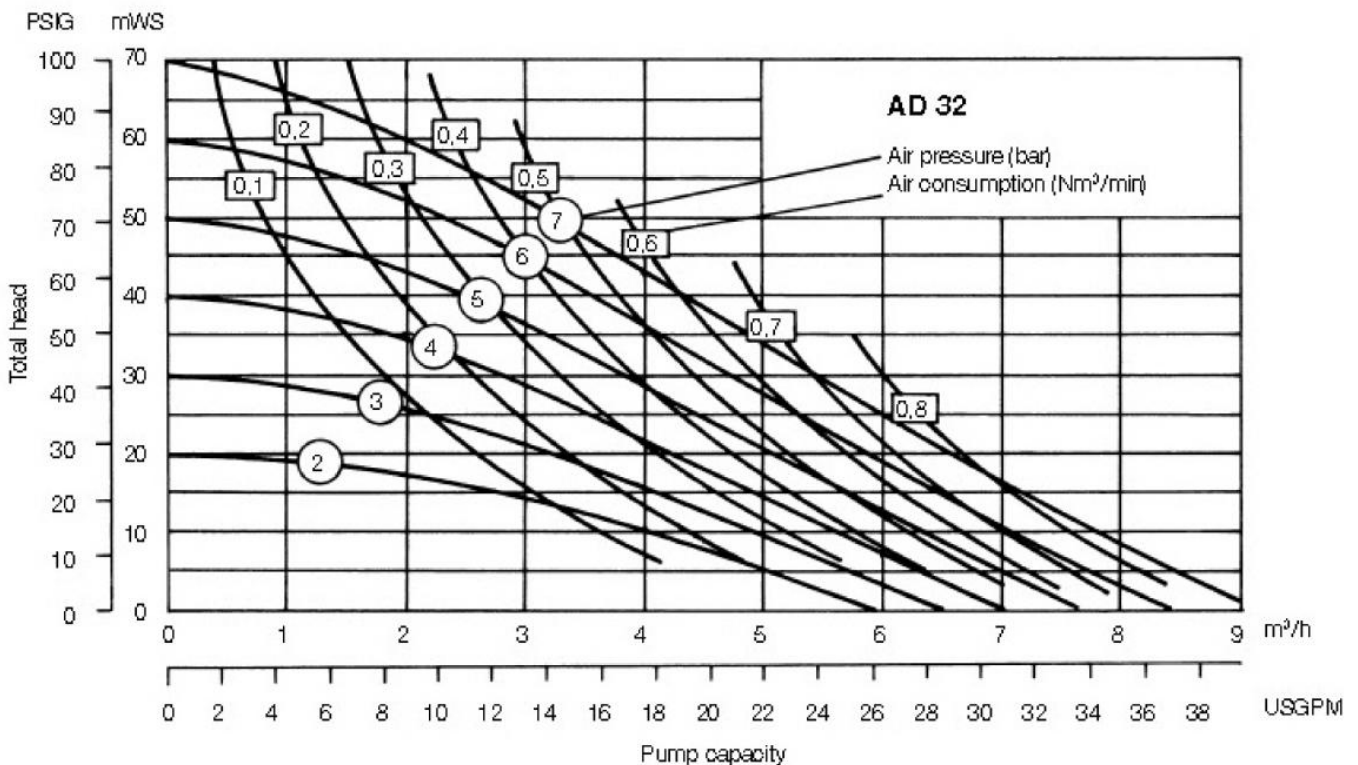

HOLLAND AIR PUMPS BV

De Scheper 260
 NL 5688 HP OIRSCHOT
 THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
 INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831