

ALMATEC PUMP E08

1/4" METAL ATEX



WETTED HOUSINGS

Material
PTFE conductive

Ship Wt
2 kg (4 lbs)



NON-WETTED HOUSINGS

Description
Center Section
Air Valve


Material
PTFE conductive
PETP

ELASTOMER OPTIONS

Material
PTFE

Temperature limits
+4.4 (+40) to +104.4 (+220) °C (F°)

MAX FLOW RATE: 15 LPM (4 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 2 mm (0.08")
MAX SUCTION LIFT CAPABILITY:
 1 m (3.3') Dry, 9 m (29.5 ') Wet

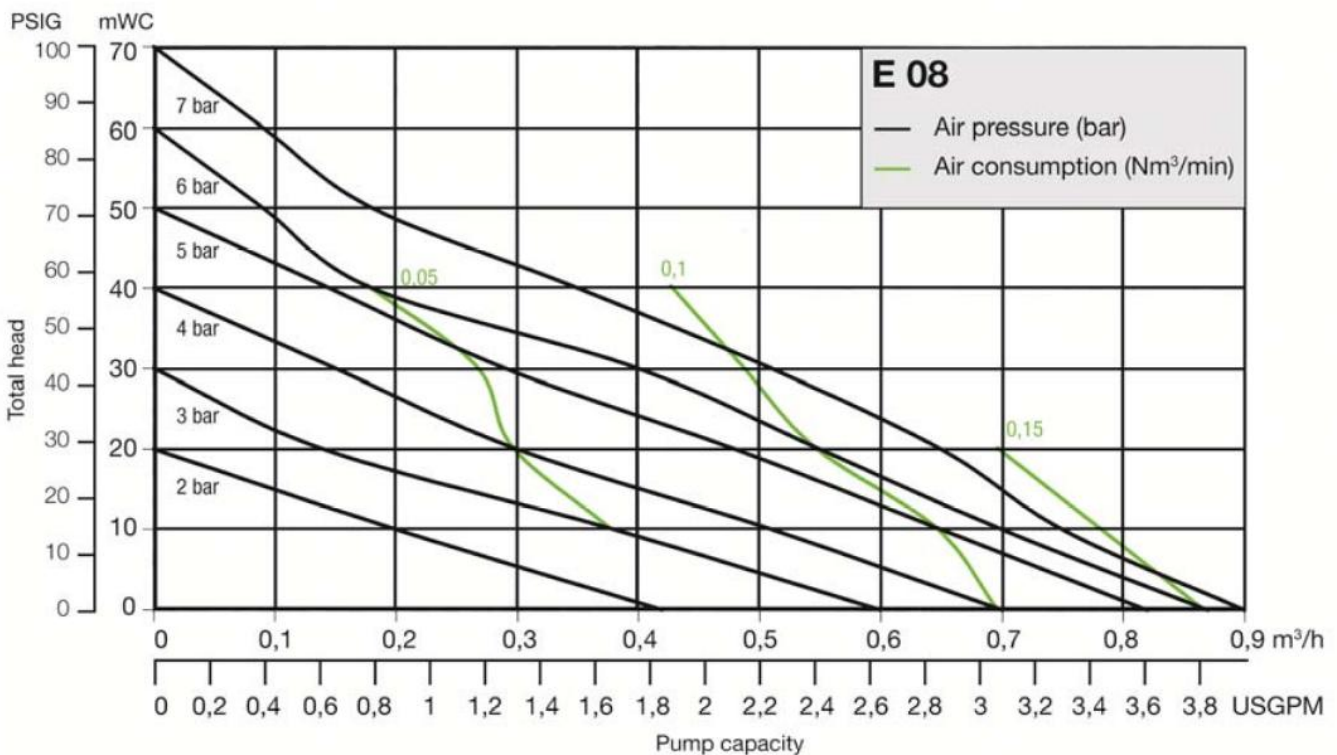

HOLLAND AIR PUMPS BV

De Scheper 260
 NL 5688 HP OIRSCHOT
 THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
 INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831