

ALMATEC PUMP E10

3/8" PLASTIC ATEX



WETTED HOUSINGS

Material
PTFE conductive

Ship Wt
5 kg (11 lbs)



NON-WETTED HOUSINGS

Description
Center Section
Air Valve


Material
PTFE conductive
PETP

ELASTOMER OPTIONS

Material
EPDM™
PTFE

Temperature limits
-51.1 (-60) to +137.8 (+280) °C (F°)
+4.4 (+40) to +104.4 (+220) °C (F°)

MAX FLOW RATE: 23 LPM (6 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 3 mm (0.12")
MAX SUCTION LIFT CAPABILITY:
 2 m (6.6') Dry, 9 m (29.5') Wet

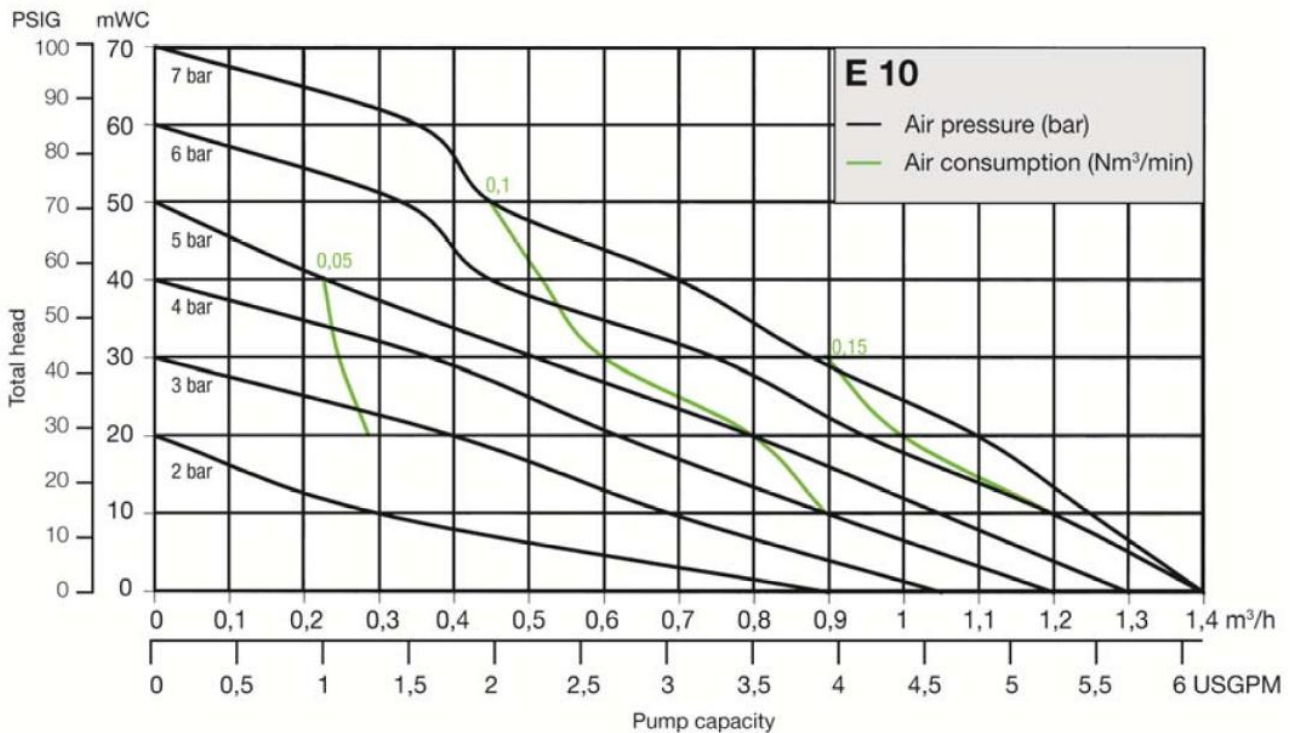

HOLLAND AIR PUMPS BV

De Scheper 260
 NL 5688 HP OIRSCHOT
 THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
 INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831