


# ALMATEC PUMP FUTUR 20

## 1/2" PLASTIC

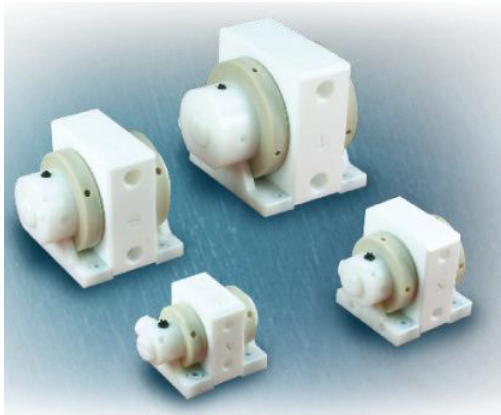

### WETTED HOUSINGS

Material	Ship Wt
PTFE/PE	4.2 kg (9.26 lbs)
PTFE	5.0 kg (11.02 lbs)
PE	2.8 kg (6.17 lbs)

### NON-WETTED HOUSINGS

Description	Material
Center Section	PTFE-TFM, UPPE
Air Valve	PETP


**MAX FLOW RATE:** 20 LPM (5.28 GPM)

**MAX PRESSURE:** 6 BAR (87.02 PSI)

**MAX SUCTION LIFT CAPABILITY:**  
2.5 m (8.2') Drv. 9 m (29.5 ') Wet

### ELASTOMER OPTIONS

Material	Temperature limits
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)

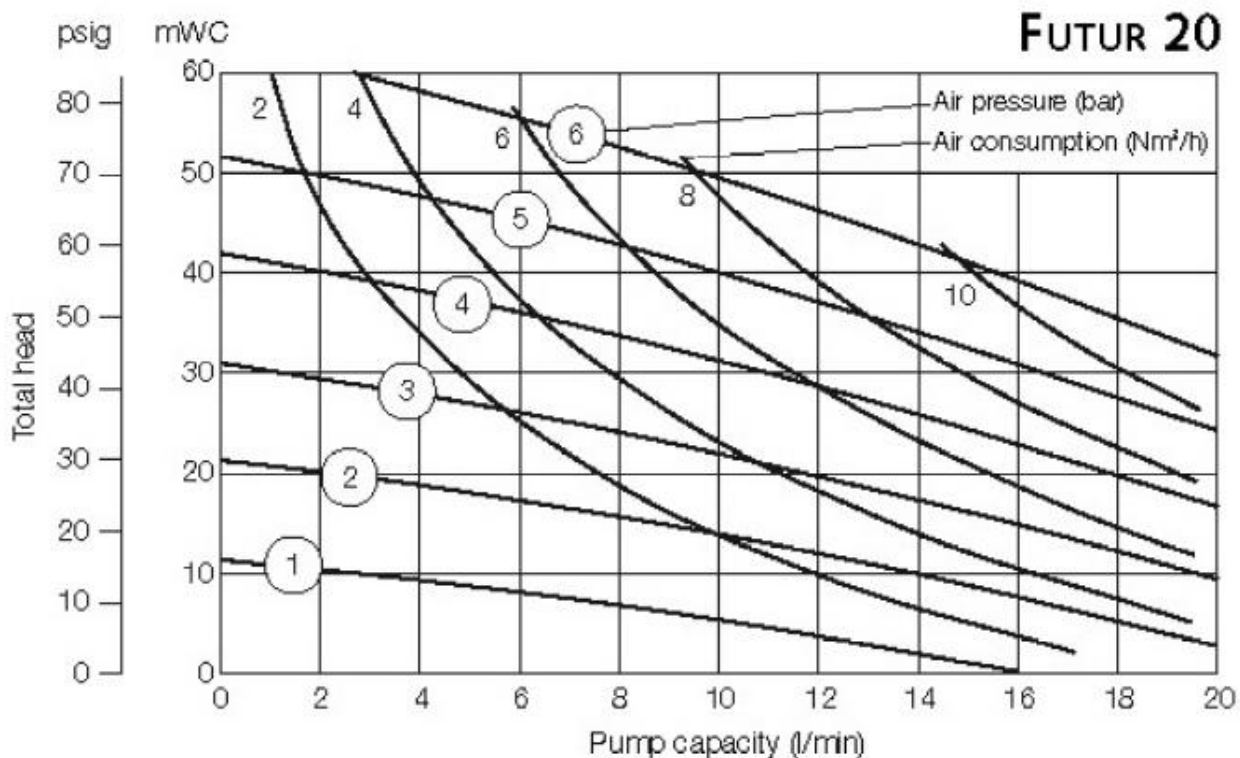

#### HOLLAND AIR PUMPS BV

De Scheper 260  
NL 5688 HP OIRSCHOT  
THE NETHERLANDS

#### PHONE

+31 (0)499 551 000

#### FAX

+31 (0)499 551 005

#### VAT

NL8033.13.123.B01

#### ING-BANK ACC

NL79 INGB 068 29 36 022

#### ONLINE

WWW.HOLLANDAIRPUMPS.NL  
INFO@HOLLANDAIRPUMPS.NL

#### CHAMBER OF COMMERCE

ROTTERDAM 24.252.831