

# ALMATEC PUMP CXM55

## 1" PLASTIC



**HOLLAND  
AIR  
PUMPS**  
PRESSURE  
TO PERFORM



**MAX FLOW RATE:** 50 LPM (13.2 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 3 mm (0.12")  
**MAX SUCTION LIFT CAPABILITY:**  
 3.5 m (11.5') Drv. 9 m (29.5 ') Wet

### WETTED HOUSINGS


<b>Material</b>	<b>Ship Wt</b>
PE conductive	4.7 kg (10.4 lbs)

### NON-WETTED HOUSINGS

<b>Description</b>	<b>Material</b>
Center Section	PE conductive
Air Valve	PETP

### ELASTOMER OPTIONS

<b>Material</b>	<b>Temperature limits</b>
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

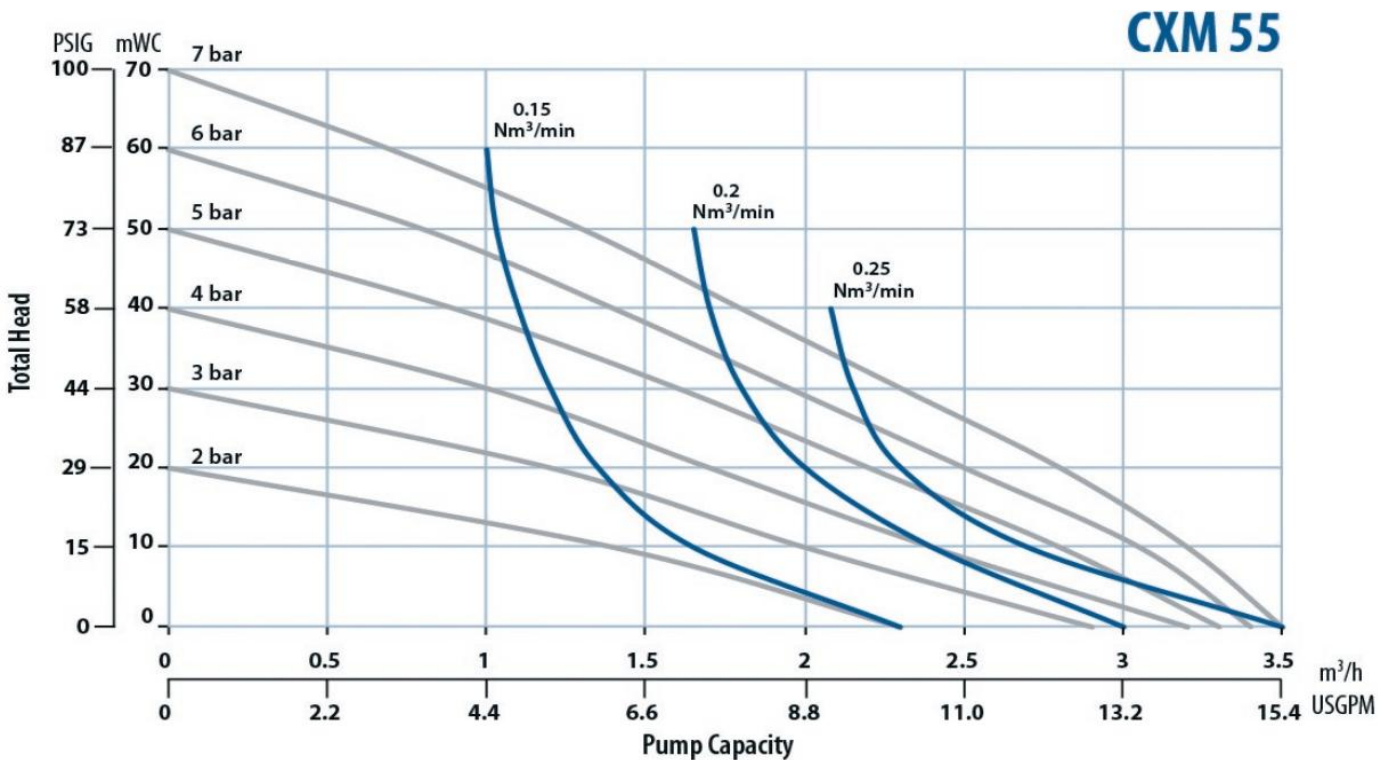

#### HOLLAND AIR PUMPS BV

De Scheper 260  
 NL 5688 HP OIRSCHOT  
 THE NETHERLANDS

#### PHONE

+31 (0)499 551 000

#### FAX

+31 (0)499 551 005

#### VAT

NL8033.13.123.B01

#### ING-BANK ACC

NL79 INGB 068 29 36 022

#### ONLINE

WWW.HOLLANDAIRPUMPS.NL  
 INFO@HOLLANDAIRPUMPS.NL

#### CHAMBER OF COMMERCE

ROTTERDAM 24.252.831