

ALMATEC PUMP B32

1½" TRI-CLAMP METAL



WETTED HOUSINGS

Material
SS 316 L

Ship Wt
26 kg (57 lbs)



NON-WETTED HOUSINGS

Description
Center Section
Air Valve


Material
PE CONDUCTIVE
PETP

MAX FLOW RATE: 125 LPM (33 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 5 mm (0.20")
MAX SUCTION LIFT CAPABILITY:
2.5 m (8.2') Dry, 9 m (29.5 ') Wet

ELASTOMER OPTIONS

Material
EPDM™ (FDA)
PTFE

Temperature limits
-51.1 (-60) to +137.8 (+280) °C (F°)
+4.4 (+40) to +104.4 (+220) °C (F°)

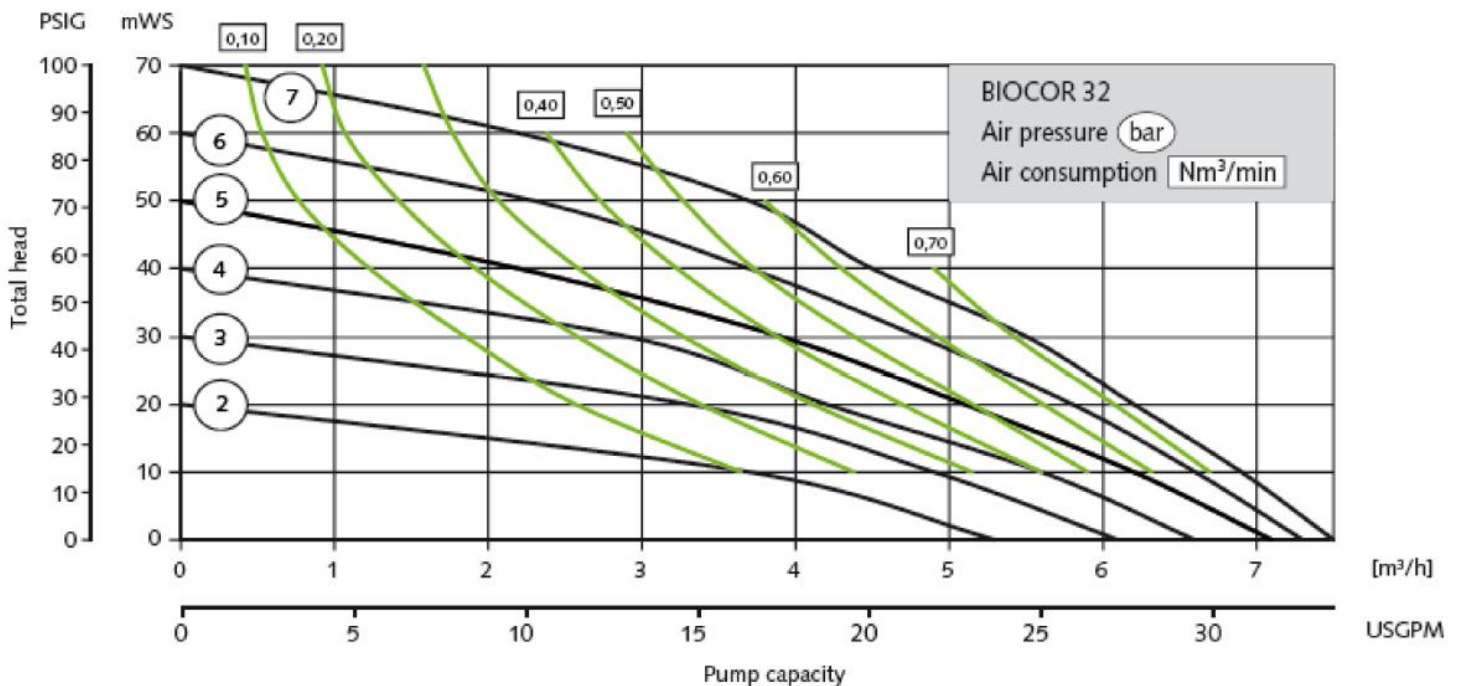

HOLLAND AIR PUMPS BV

De Scheper 260
NL 5688 HP OIRSCHOT
THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831