

ALMATEC PUMP E25

1" PLASTIC ATEX



WETTED HOUSINGS

Material	Ship Wt
PE conductive	15 kg (33 lbs)
PTFE conductive	29 kg (64 lbs)




NON-WETTED HOUSINGS

Description	Material
Center Section	PE conductive, PTFE conductive
Air Valve	PETP

ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

MAX FLOW RATE: 130 LPM (35 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 6 mm (1/4")
MAX SUCTION LIFT CAPABILITY:
 4 m (13.1') Drv. 9.5 m (31.2') Wet

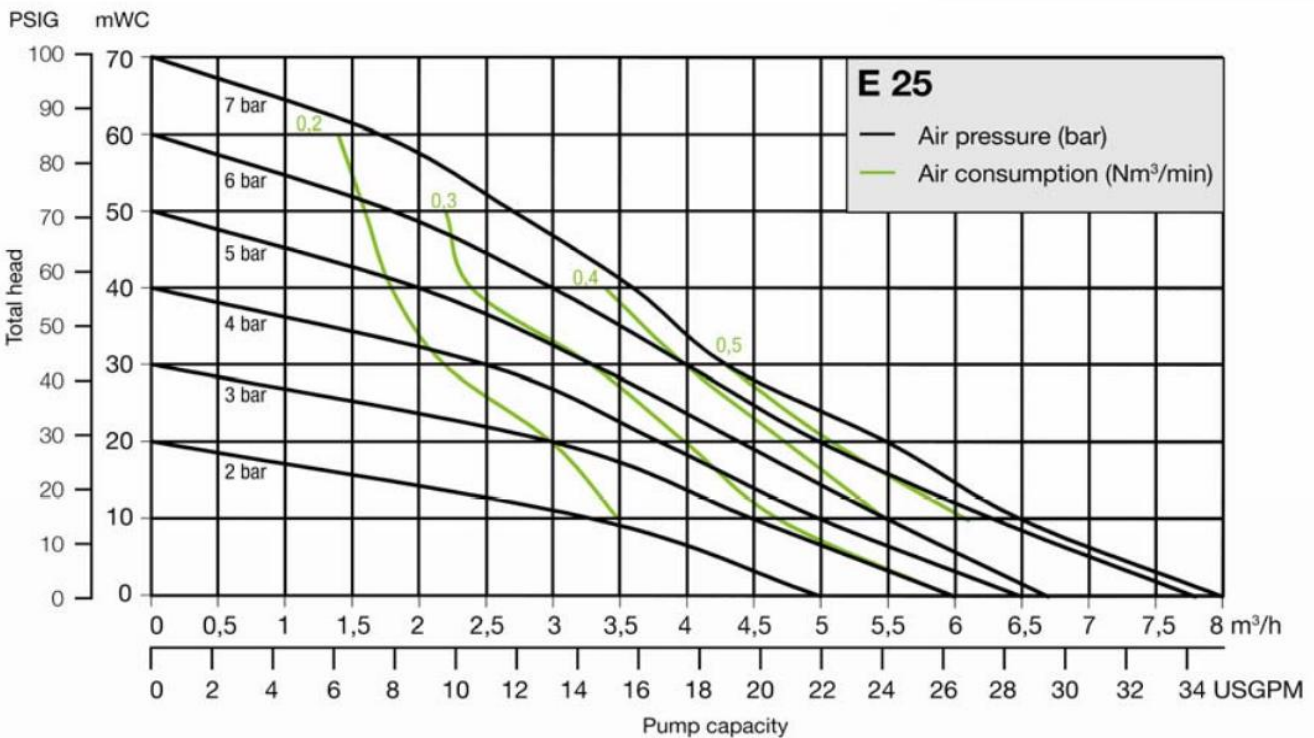

HOLLAND AIR PUMPS BV
 De Scheper 260
 NL 5688 HP OIRSCHOT
 THE NETHERLANDS

PHONE
 +31 (0)499 551 000
FAX
 +31 (0)499 551 005

VAT
 NL8033.13.123.B01
ING-BANK ACC
 NL79 INGB 068 29 36 022

ONLINE
WWW.HOLLANDAIRPUMPS.NL
INFO@HOLLANDAIRPUMPS.NL
CHAMBER OF COMMERCE
 ROTTERDAM 24.252.831