

# ALMATEC PUMP E40

## 1½" PLASTIC ATEX



### WETTED HOUSINGS

<b>Material</b>	<b>Ship Wt</b>
PE conductive	34 kg (75 lbs)
PTFE conductive	69 kg (152 lbs)




### NON-WETTED HOUSINGS

<b>Description</b>	<b>Material</b>
Center Section	PE conductive, PTFE conductive
Air Valve	PETP

### ELASTOMER OPTIONS

<b>Material</b>	<b>Temperature limits</b>
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

**MAX FLOW RATE:** 330 LPM (88 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 9 mm (0.35")  
**MAX SUCTION LIFT CAPABILITY:**  
 5 m (16.4') Drv. 9.5 m (31.2') Wet

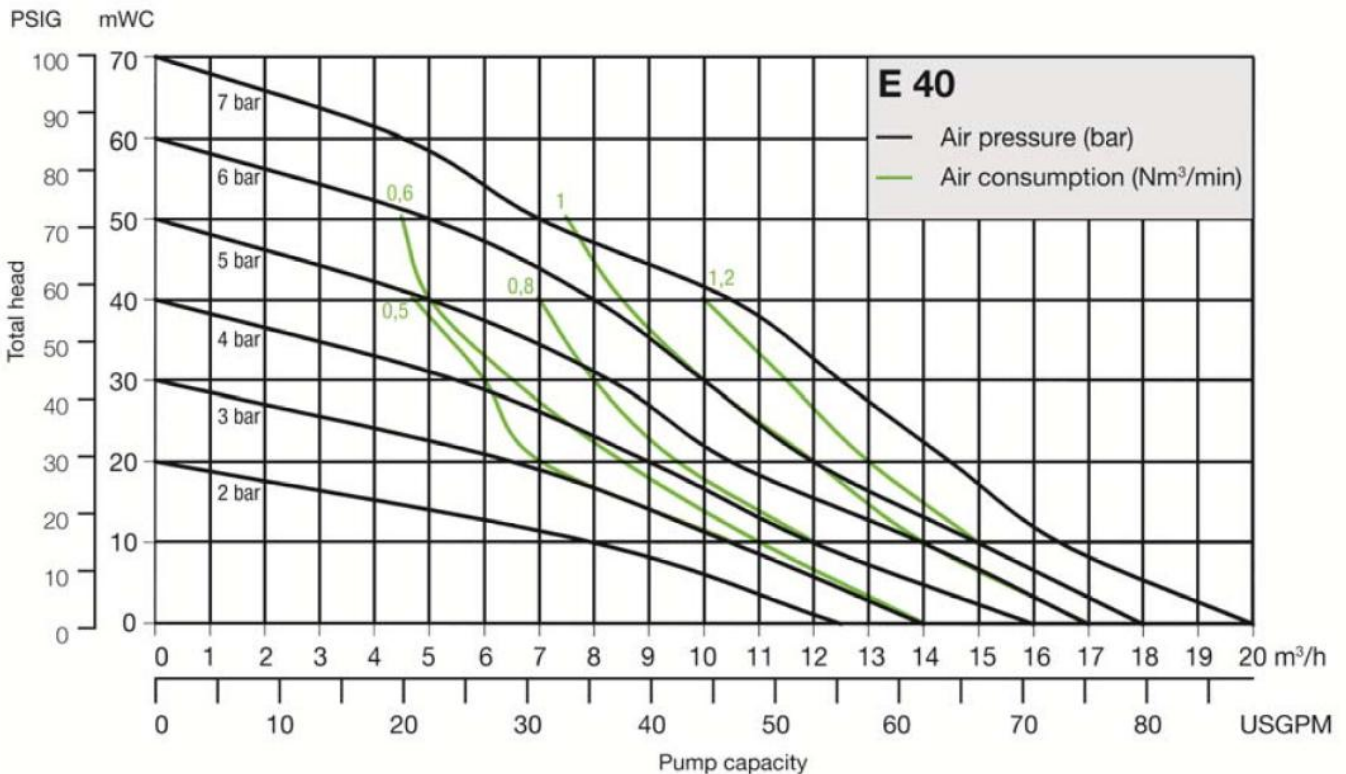

**HOLLAND AIR PUMPS BV**  
 De Scheper 260  
 NL 5688 HP OIRSCHOT  
 THE NETHERLANDS

**PHONE**  
 +31 (0)499 551 000  
**FAX**  
 +31 (0)499 551 005

**VAT**  
 NL8033.13.123.B01  
**ING-BANK ACC**  
 NL79 INGB 068 29 36 022

**ONLINE**  
[WWW.HOLLANDAIRPUMPS.NL](http://WWW.HOLLANDAIRPUMPS.NL)  
[INFO@HOLLANDAIRPUMPS.NL](mailto:INFO@HOLLANDAIRPUMPS.NL)  
**CHAMBER OF COMMERCE**  
 ROTTERDAM 24.252.831