

# ALMATEC PUMP AHS25

## 1" PLASTIC



### WETTED HOUSINGS

<b>Material</b>	<b>Ship Wt</b>
PE UHMW	19 kg (42 lbs)

### NON-WETTED HOUSINGS


<b>Description</b>	<b>Material</b>
Center Section	PA
Air Valve	PETP

### ELASTOMER OPTIONS

<b>Material</b>	<b>Temperature limits</b>
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

**MAX FLOW RATE:** 132.5 LPM (35 GPM)  
**MAX PRESSURE:** 15 BAR (118 PSI)  
**MAX DIAMETER SOLIDS:** 5 mm (0.20")  
**MAX SUCTION LIFT CAPABILITY:**  
 2.5 m (8.2') Dry, 9.5 m (31.2 ') Wet

## AHS 25

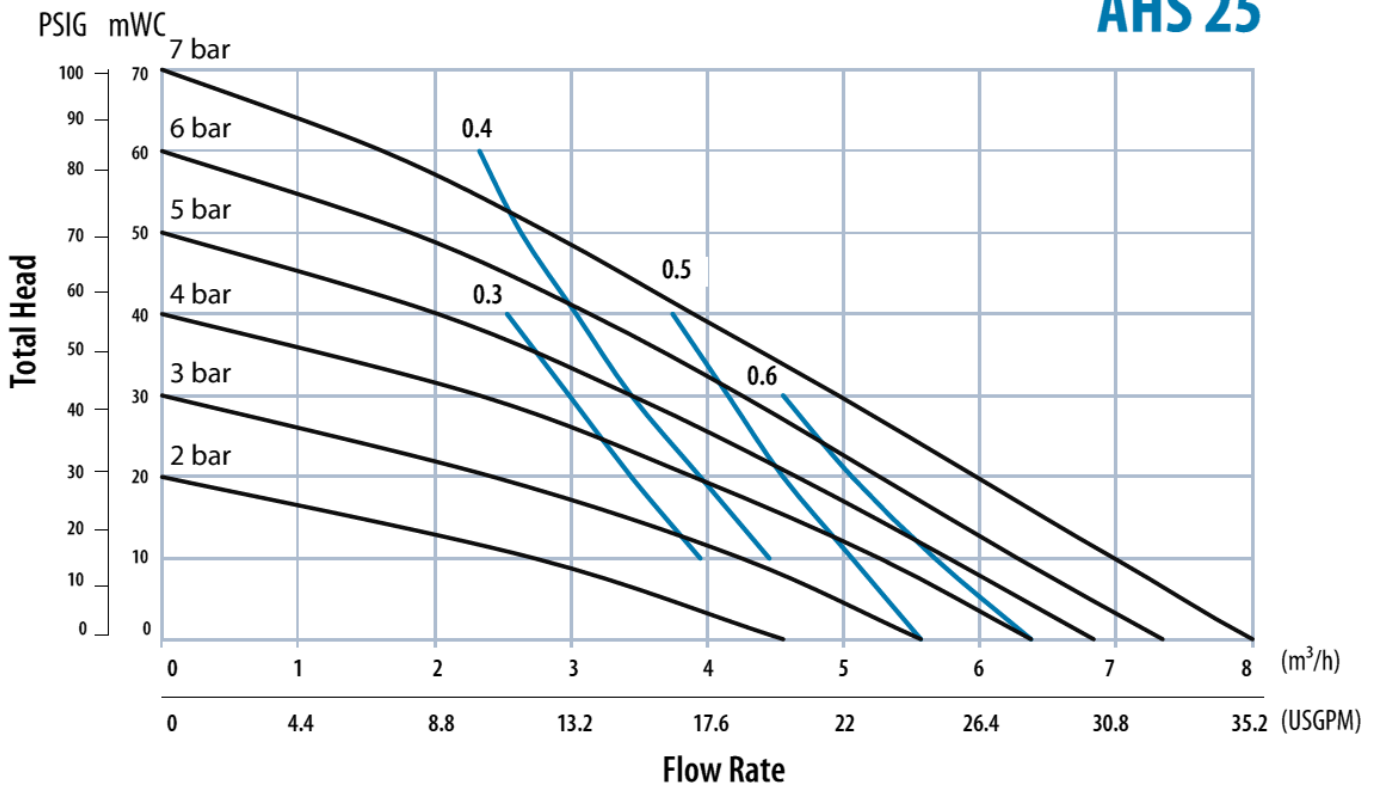

**HOLLAND AIR PUMPS BV**  
 De Scheper 260  
 NL 5688 HP OIRSCHOT  
 THE NETHERLANDS

**PHONE**  
 +31 (0)499 551 000  
**FAX**  
 +31 (0)499 551 005

**VAT**  
 NL8033.13.123.B01  
**ING-BANK ACC**  
 NL79 INGB 068 29 36 022

**ONLINE**  
[WWW.HOLLANDAIRPUMPS.NL](http://WWW.HOLLANDAIRPUMPS.NL)  
[INFO@HOLLANDAIRPUMPS.NL](mailto:INFO@HOLLANDAIRPUMPS.NL)  
**CHAMBER OF COMMERCE**  
 ROTTERDAM 24.252.831