

# ALMATEC PUMP E10

## 3/8" PLASTIC



### WETTED HOUSINGS

| Material        | Ship Wt       |
|-----------------|---------------|
| PTFE            | 5 kg (11 lbs) |
| PTFE conductive | 5 kg (11 lbs) |


### NON-WETTED HOUSINGS

| Description    | Material              |
|----------------|-----------------------|
| Center Section | PTFE, PTFE conductive |
| Air Valve      | PETP                  |

### ELASTOMER OPTIONS

| Material | Temperature limits                   |
|----------|--------------------------------------|
| EPDM™    | -51.1 (-60) to +137.8 (+280) °C (F°) |
| PTFE     | +4.4 (+40) to +104.4 (+220) °C (F°)  |
| NBR      | -12.2 (+10) to +82.2 (+180) °C (F°)  |

**MAX FLOW RATE:** 23 LPM (6 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 3 mm (0.12")  
**MAX SUCTION LIFT CAPABILITY:**  
 2 m (6.6') Dry, 9 m (29.5') Wet

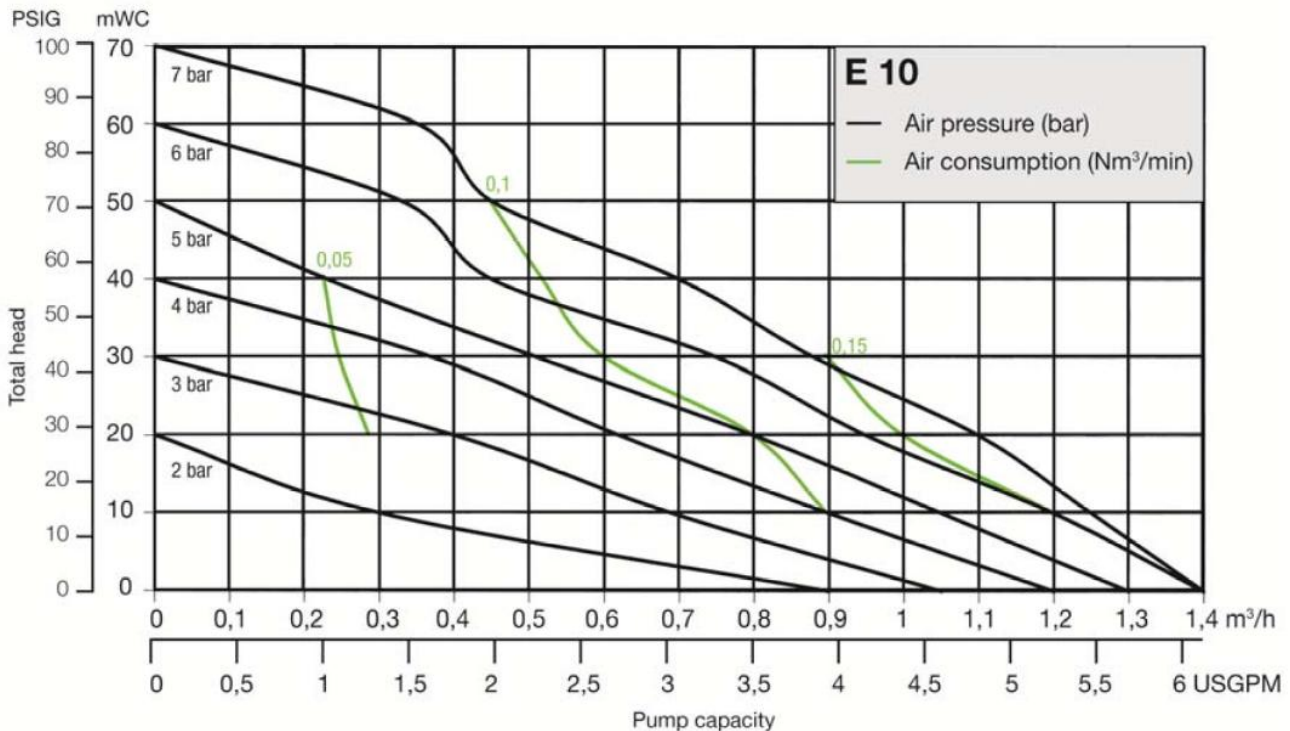

**HOLLAND AIR PUMPS BV**  
 De Scheper 260  
 NL 5688 HP OIRSCHOT  
 THE NETHERLANDS

**PHONE**  
 +31 (0)499 551 000  
**FAX**  
 +31 (0)499 551 005

**VAT**  
 NL8033.13.123.B01  
**ING-BANK ACC**  
 NL79 INGB 068 29 36 022

**ONLINE**  
[WWW.HOLLANDAIRPUMPS.NL](http://WWW.HOLLANDAIRPUMPS.NL)  
[INFO@HOLLANDAIRPUMPS.NL](mailto:INFO@HOLLANDAIRPUMPS.NL)  
**CHAMBER OF COMMERCE**  
 ROTTERDAM 24.252.831