

# ALMATEC PUMP E50

## 2" PLASTIC ATEX



### WETTED HOUSINGS

<b>Material</b>	<b>Ship Wt</b>
PE conductive	66 kg (146 lbs)
PTFE conductive	131 kg (289 lbs)




### NON-WETTED HOUSINGS

<b>Description</b>	<b>Material</b>
Center Section	PE conductive, PTFE conductive
Air Valve	PETP

### ELASTOMER OPTIONS

<b>Material</b>	<b>Temperature limits</b>
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

**MAX FLOW RATE:** 600 LPM (160 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 11 mm (0.43")  
**MAX SUCTION LIFT CAPABILITY:**  
 5 m (16.4') Dry, 9.5 m (31.2') Wet

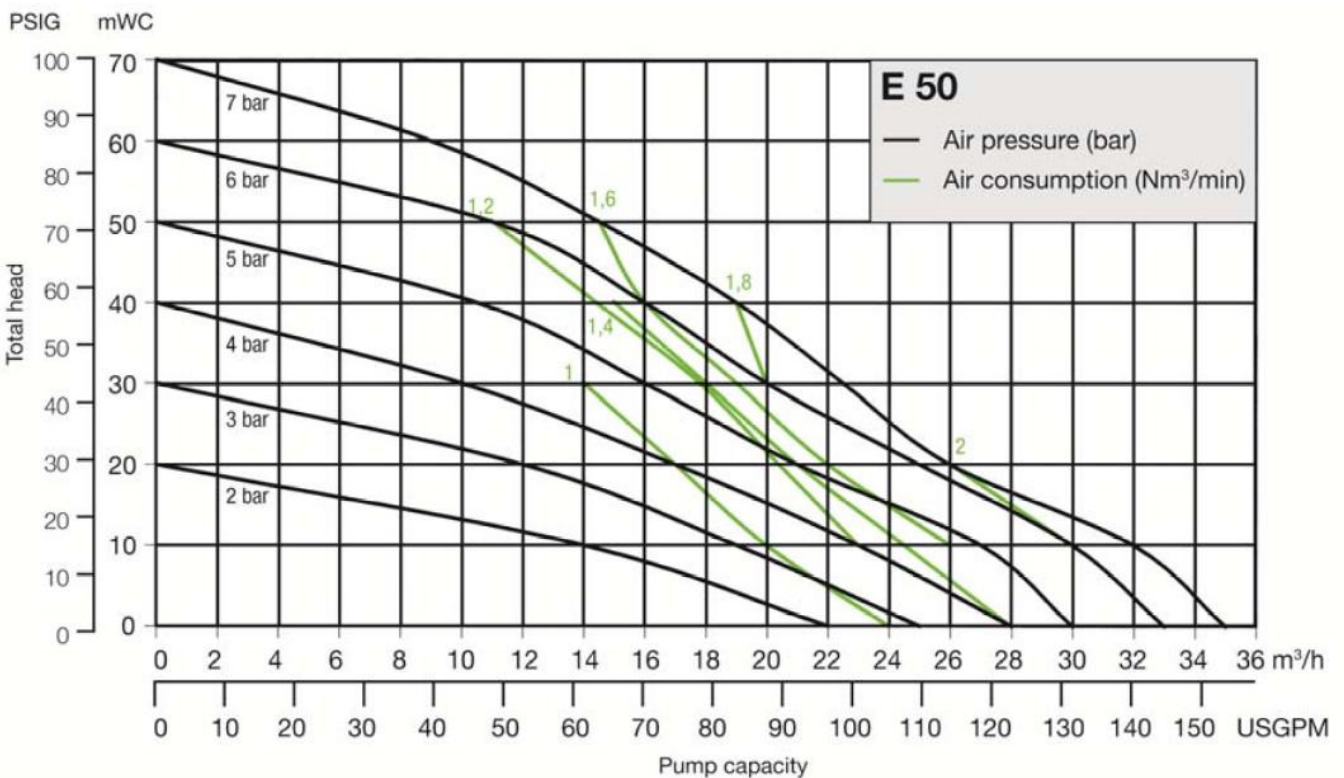

#### HOLLAND AIR PUMPS BV

De Scheper 260  
 NL 5688 HP OIRSCHOT  
 THE NETHERLANDS

#### PHONE

+31 (0)499 551 000

#### FAX

+31 (0)499 551 005

#### VAT

NL8033.13.123.B01

#### ING-BANK ACC

NL79 INGB 068 29 36 022

#### ONLINE

WWW.HOLLANDAIRPUMPS.NL  
 INFO@HOLLANDAIRPUMPS.NL

#### CHAMBER OF COMMERCE

ROTTERDAM 24.252.831