

WILDEN PUMP P8

2" PLASTIC



MAX FLOW RATE: 644 LPM (170 GPM)
MAX PRESSURE: 8.6 BAR (125 PSI)
MAX SUCTION LIFT CAPABILITY:
 7.8 m (25.5') Dry, 9.2 m (30.1') Wet
MAX DIAMETER SOLIDS:
 6.35 mm (1/4")

WETTED HOUSINGS

Material Polypropylene
Ship Wt 34 kg (75 lbs)

NON-WETTED HOUSINGS

Description Center Section
 Air Chambers
 Air Valve


Material Polypropylene
 Aluminum, Teflon®-coated aluminium
 Stainless Steel 316
 Polypropylene

ELASTOMER OPTIONS

Buna-N® -12.2 (+10) to +82.2 (+180) °C (F°)
 Neoprene -17.8 (+0) to +93.3 (+200) °C (F°)
 EPDM™ -51.1 (-60) to +137.8 (+280) °C (F°)
 Polyurethane -12.2 (+10) to +65.6 (+150) °C (F°)
 Saniflex™ -28.9 (+20) to +104.4 (+220) °C (F°)
 PTFE +4.4 (+40) to +104.4 (+220) °C (F°)
 Viton® -40 (-40) to +176.7 (+350) °C (F°)
 Wil-Flex™ -40 (-40) to +107.2 (+225) °C (F°)
 Geolast® -40 (-40) to +82 (+180) °C (F°)

DIMENSIONS

| ITEM | METRIC (mm) | STANDARD (inch) |
|------|-------------------|--------------------|
| A | 490 | 19.3 |
| B | 76 | 3.0 |
| C | 414 | 16.3 |
| D | 693 | 27.3 |
| E | 770 | 30.3 |
| F | 89 | 3.5 |
| G | 417 | 16.4 |
| H | 333 | 13.1 |
| J | 381 | 15.0 |
| K | 307 | 12.1 |
| L | 227 | 8.9 |
| M | 254 | 10.0 |
| N | 15 | 0.6 |
| | DIN FLANGE | ANSI FLANGE |
| P | 125 DIA. | 4.8 DIA. |
| R | 165 DIA. | 6.0 DIA. |
| S | 18 DIA. | .8 DIA. |

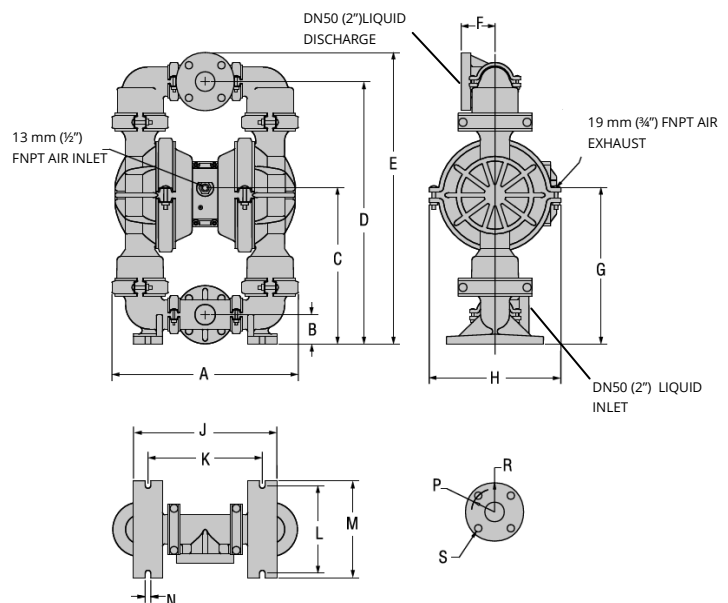

HOLLAND AIR PUMPS BV

De Schepers 260
 NL 5688 HP OIRSCHOT
 THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
 INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831