

# ALMATEC PUMP CXM10

## 3/8" PLASTIC



**HOLLAND  
AIR  
PUMPS**  
PRESSURE  
TO PERFORM



### WETTED HOUSINGS

Material	Ship Wt
PE conductive	1.00 kg (2.2 lbs)

### NON-WETTED HOUSINGS

Description	Material
Center Section	PE conductive
Air Valve	PETP

### ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)


**MAX FLOW RATE:** 10 LPM (2.6 GPM)

**MAX PRESSURE:** 7 BAR (100 PSI)

**MAX DIAMETER SOLIDS:** 1.5 mm (0.06")

**MAX SUCTION LIFT CAPABILITY:**

0.7 m (2.3') Dry, 8 m (26.2') Wet

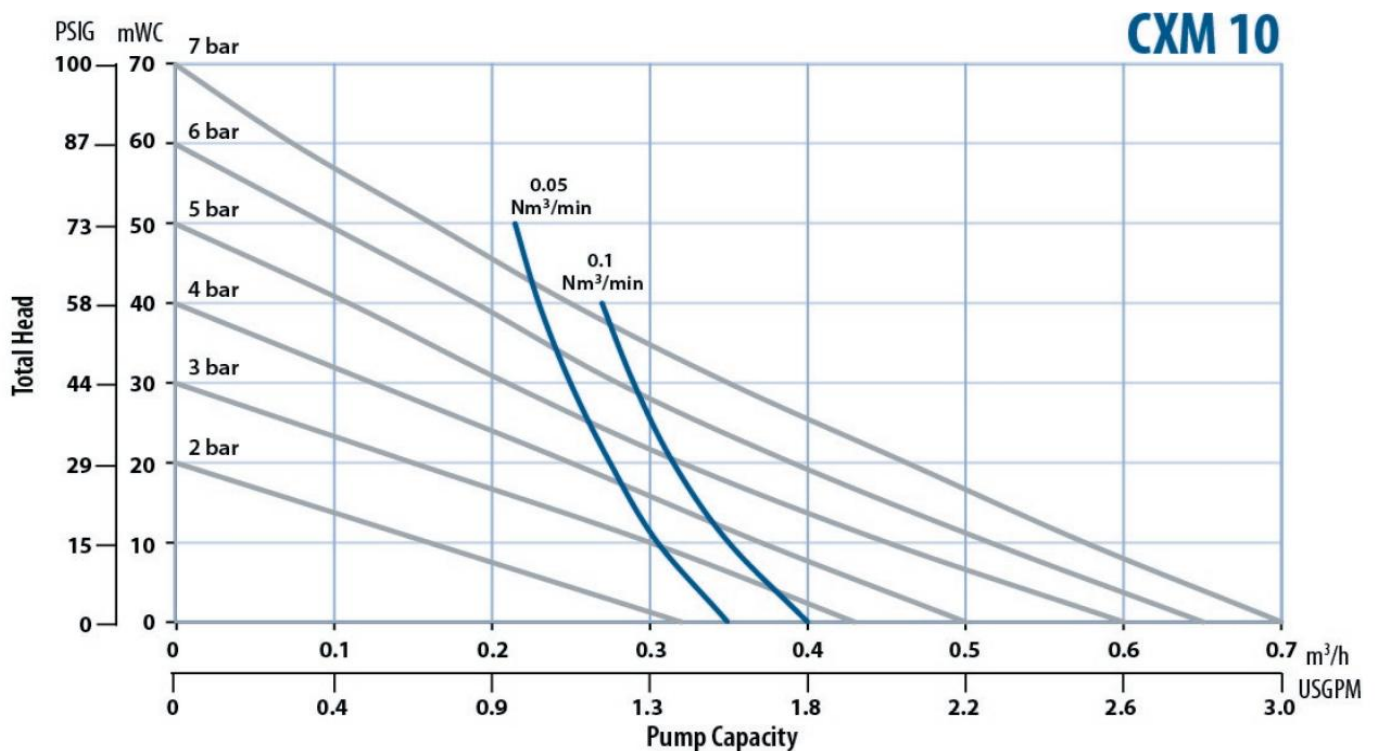

#### HOLLAND AIR PUMPS BV

De Scheper 260  
NL 5688 HP OIRSCHOT  
THE NETHERLANDS

#### PHONE

+31 (0)499 551 000

#### FAX

+31 (0)499 551 005

#### VAT

NL8033.13.123.B01

#### ING-BANK ACC

NL79 INGB 068 29 36 022

#### ONLINE

WWW.HOLLANDAIRPUMPS.NL  
INFO@HOLLANDAIRPUMPS.NL

#### CHAMBER OF COMMERCE

ROTTERDAM 24.252.831