

# ALMATEC PUMP B40

## 2" TRI-CLAMP METAL



### WETTED HOUSINGS

**Material**  
SS 316 L

**Ship Wt**  
67 kg (147 lbs)



### NON-WETTED HOUSINGS

**Description**  
Center Section  
Air Valve


**Material**  
PE CONDUCTIVE  
PETP

**MAX FLOW RATE:** 284 LPM (75 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 9 mm (0.35")  
**MAX SUCTION LIFT CAPABILITY:**  
3 m (9.8') Dry, 9 m (29.5 ') Wet

### ELASTOMER OPTIONS

**Material**  
EPDM™ (FDA)  
PTFE

**Temperature limits**  
-51.1 (-60) to +137.8 (+280) °C (F°)  
+4.4 (+40) to +104.4 (+220) °C (F°)

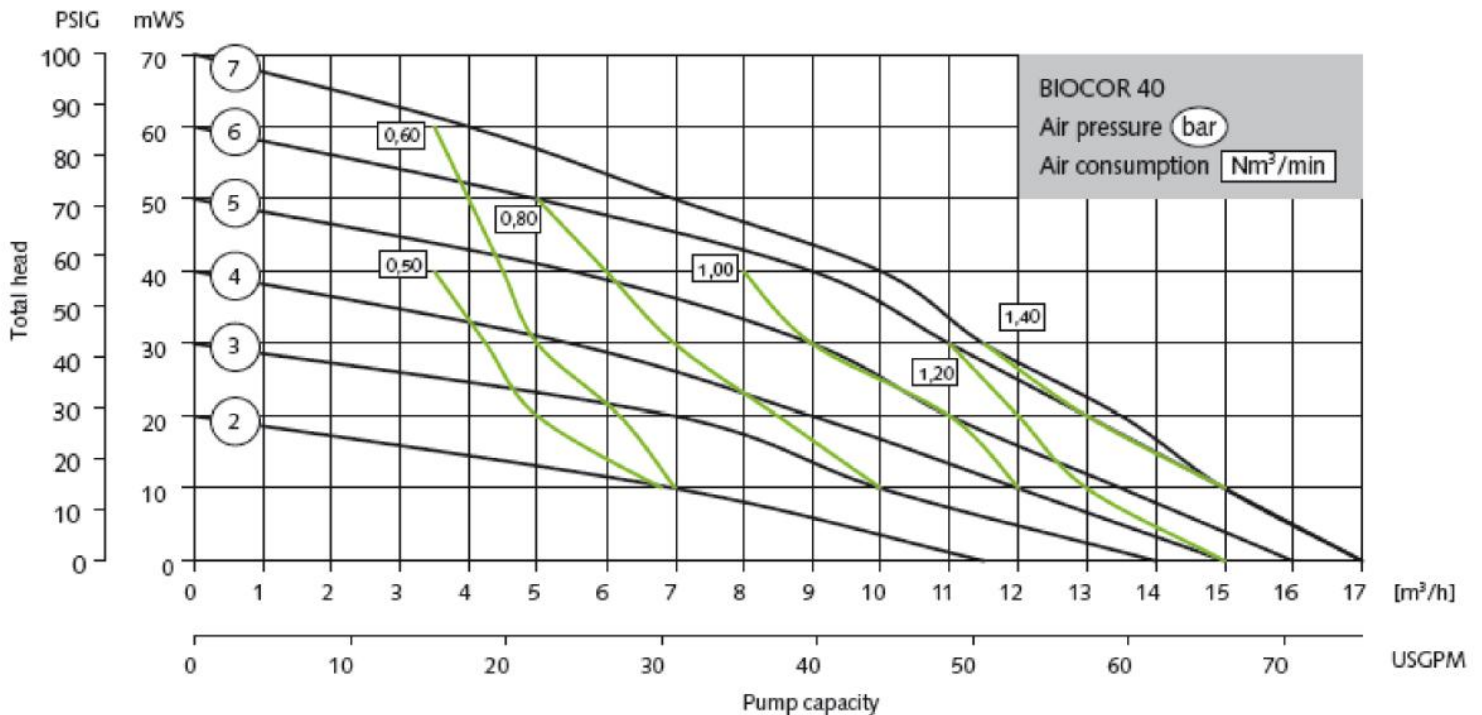

#### HOLLAND AIR PUMPS BV

De Scheper 260  
NL 5688 HP OIRSCHOT  
THE NETHERLANDS

#### PHONE

+31 (0)499 551 000

#### FAX

+31 (0)499 551 005

#### VAT

NL8033.13.123.B01

#### ING-BANK ACC

NL79 INGB 068 29 36 022

#### ONLINE

WWW.HOLLANDAIRPUMPS.NL  
INFO@HOLLANDAIRPUMPS.NL

#### CHAMBER OF COMMERCE

ROTTERDAM 24.252.831