

# ALMATEC PUMP E25

## 1" PLASTIC



### WETTED HOUSINGS

Material	Ship Wt
PE	15 kg (33 lbs)
PTFE	29 kg (64 lbs)


### NON-WETTED HOUSINGS

Description	Material
Center Section	PE, PTFE
Air Valve	PETP

### ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

**MAX FLOW RATE:** 130 LPM (35 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 6 mm (1/4")  
**MAX SUCTION LIFT CAPABILITY:**  
 4 m (13.1') Drv. 9.5 m (31.2') Wet

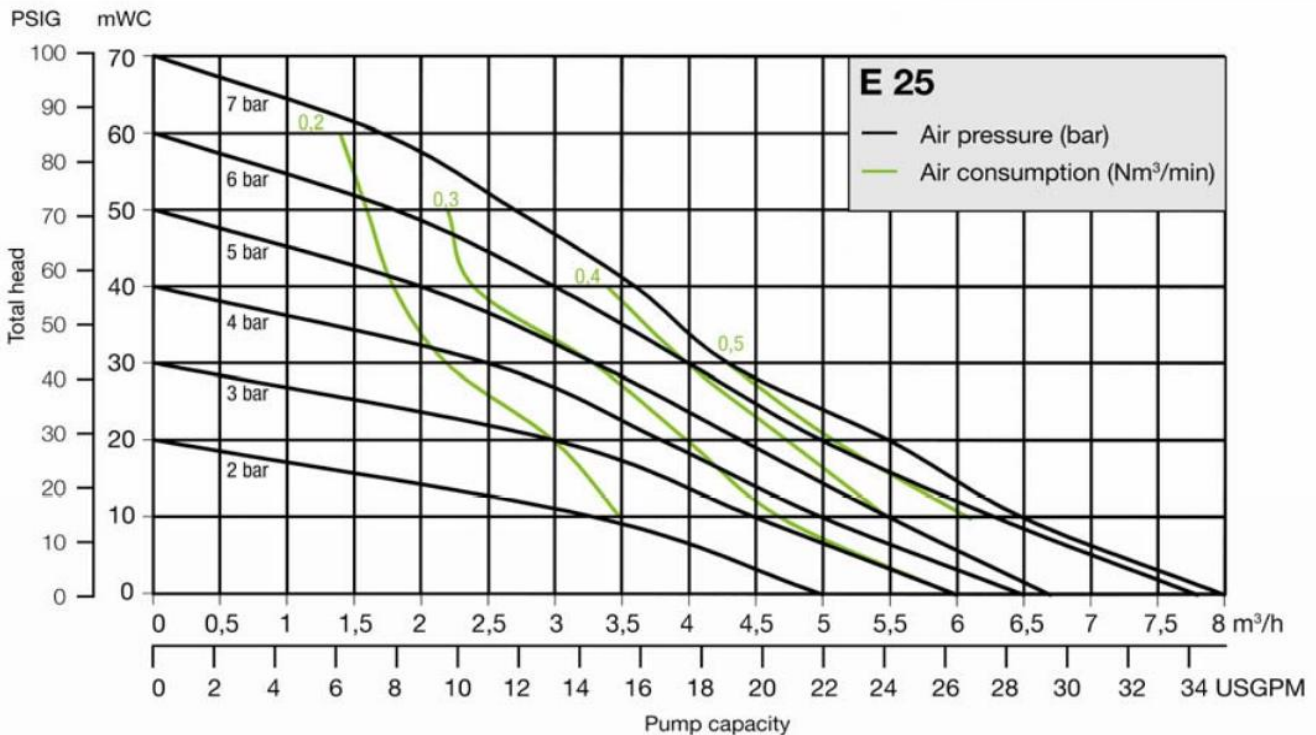

#### HOLLAND AIR PUMPS BV

De Scheper 260  
 NL 5688 HP OIRSCHOT  
 THE NETHERLANDS

#### PHONE

+31 (0)499 551 000

#### FAX

+31 (0)499 551 005

#### VAT

NL8033.13.123.B01

#### ING-BANK ACC

NL79 INGB 068 29 36 022

#### ONLINE

WWW.HOLLANDAIRPUMPS.NL  
 INFO@HOLLANDAIRPUMPS.NL

#### CHAMBER OF COMMERCE

ROTTERDAM 24.252.831