

ALMATEC PUMP E40

1½" PLASTIC



WETTED HOUSINGS

Material	Ship Wt
PE	34 kg (75 lbs)
PTFE	69 kg (152 lbs)


NON-WETTED HOUSINGS

Description	Material
Center Section	PE, PTFE
Air Valve	PETP

ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

MAX FLOW RATE: 330 LPM (88 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 9 mm (0.35")
MAX SUCTION LIFT CAPABILITY:
 5 m (16.4') Dry, 9.5 m (31.2') Wet

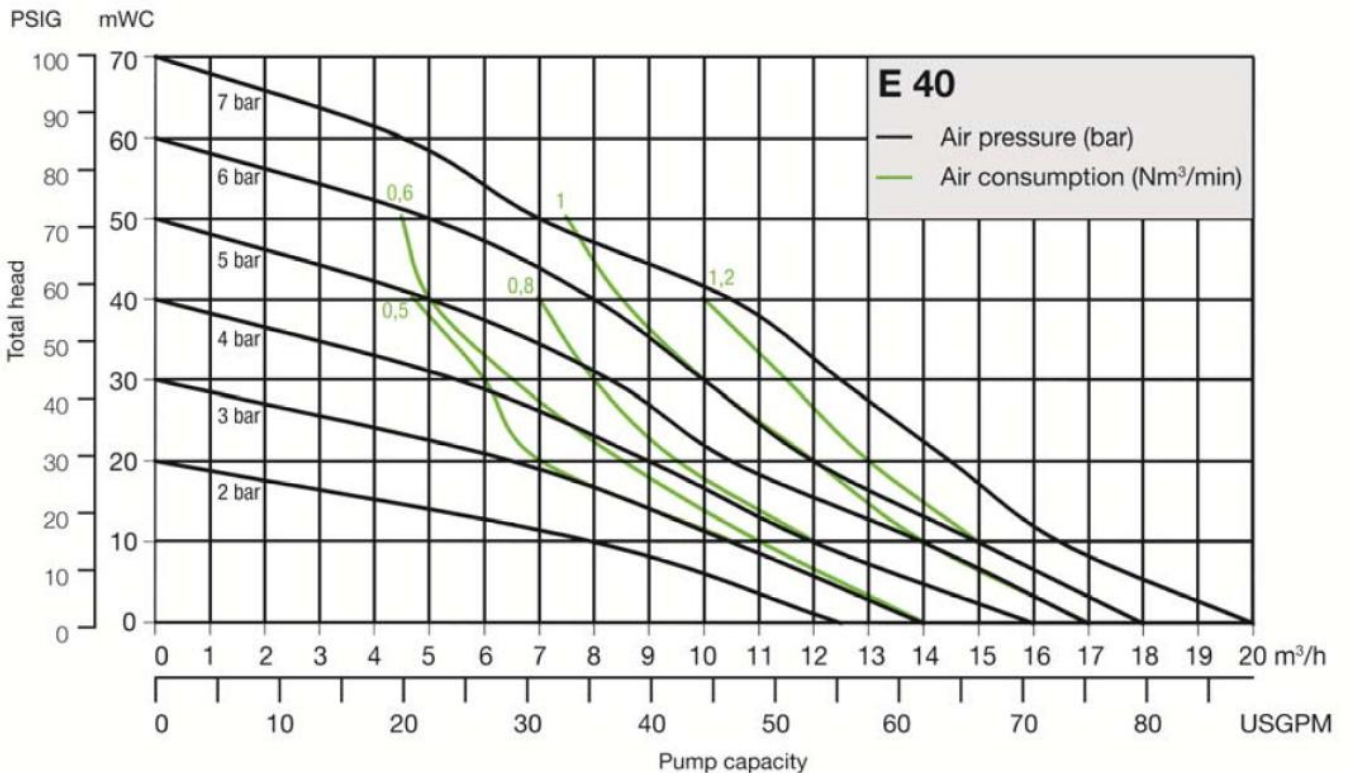

HOLLAND AIR PUMPS BV

De Scheper 260
 NL 5688 HP OIRSCHOT
 THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
 INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831