

WILDEN PUMP XPS1530

3" METAL FIT Ductile iron



**HOLLAND
AIR
PUMPS**
PRESSURE
TO PERFORM



MAX FLOW RATE: 1026 LPM (271 GPM)

MAX PRESSURE: 8.6 BAR (125 PSI)

MAX SUCTION LIFT CAPABILITY:

6.7 m (22.1') Dry, 9.7 m (31.8') Wet

MAX DIAMETER SOLIDS:

12.7 mm (1/2")

WETTED HOUSINGS

Material

Ductile iron

Ship Wt

124 kg (272 lbs)

NON-WETTED HOUSINGS

Description

Center Section

Air Valve

Material

Aluminum, Polypropylene

Aluminum, Polypropylene

ELASTOMER OPTIONS

Buna-N®

-12.2 (+10) to +82.2 (+180) °C (F°)

Neoprene

-17.8 (+0) to +93.3 (+200) °C (F°)

EPDM™

-51.1 (-60) to +137.8 (+280) °C (F°)

Polyurethane

-12.2 (+10) to +65.6 (+150) °C (F°)

Saniflex™

-28.9 (+20) to +104.4 (+220) °C (F°)

PTFE

+4.4 (+40) to +104.4 (+220) °C (F°)

Viton®

-40 (-40) to +176.7 (+350) °C (F°)

Wil-Flex™





-40 (-40) to +107.2 (+225) °C (F°)

Geolast®

-40 (-40) to +82 (+180) °C (F°)

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	673	26.5
B	105	4.1
C	477	18.8
D	796	31.3
E	890	35.1
F	891	35.3
G	90	3.6
H	88	3.5
J	465	18.3
K	48	1.9
L	211	8.3
M	189	7.4
N	184	7.3
P	721	28.4
R	715	28.2
S	356	14.0
T	305	12.0
U	256	10.1
V	279	11.0
W	14	0.6
	DIN (mm)	ANSI (inch)
X	200 DIA.	7.5 DIA.
Y	160 DIA.	6.0 DIA.
Z	18 DIA.	0.8 DIA.

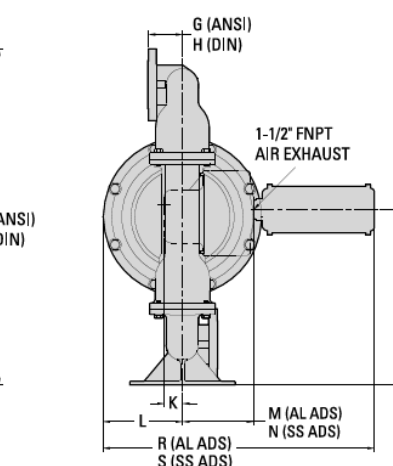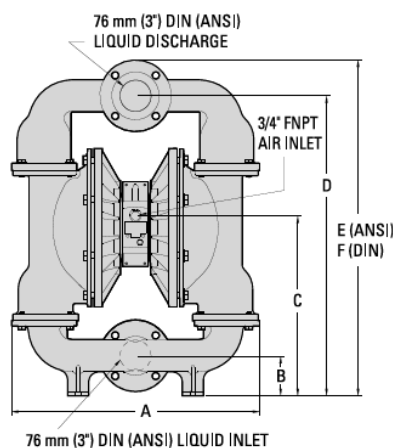

HOLLAND AIR PUMPS BV

De Scheper 260
NL 5688 HP OIRSCHOT
THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831