

WILDEN PUMP XPS1530

3" METAL



MAX FLOW RATE: 1045 LPM (276 GPM)

MAX PRESSURE: 8.6 BAR (125 PSI)

MAX SUCTION LIFT CAPABILITY:

7.2 m (23.8) Dry, 9.0 m (29.5') Wet

MAX DIAMETRE SOLIDS:

12.7 mm (1/2")

WETTED HOUSINGS

Material

Aluminum

Ship Wt

101 kg (223 lbs)

NON-WETTED HOUSINGS

Description

Center Section

Air Valve

Material

Aluminum

Aluminum

ELASTOMER OPTIONS

Buna-N®

-12.2 (+10) to +82.2 (+180) °C (F°)

Neoprene

-17.8 (+0) to +93.3 (+200) °C (F°)

EPDM™

-51.1 (-60) to +137.8 (+280) °C (F°)

Polyurethane

-12.2 (+10) to +65.6 (+150) °C (F°)

Saniflex™

-28.9 (+20) to +104.4 (+220) °C (F°)

PTFE

+4.4 (+40) to +104.4 (+220) °C (F°)

Viton®

-40 (-40) to +176.7 (+350) °C (F°)

Wil-Flex™


-40 (-40) to +107.2 (+225) °C (F°)

Geolast®

-40 (-40) to +82 (+180) °C (F°)

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	615	24.2
B	127	5.0
C	545	21.5
D	551	21.7
E	934	36.8
F	1031	40.6
G	165	6.5
H	533	21.0
J	48	1.9
K	211	8.3
L	400	15.8
M	388	15.3
N	721	28.4
P	709	27.9
R	363	14.3
S	307	12.1
T	259	10.2
U	282	11.1
V	18	0.7
	DIN (mm)	ANSI (inch)
W	200 DIA.	7.5 DIA.
X	160 DIA.	6.0 DIA.
Y	18 DIA.	0.8 DIA.

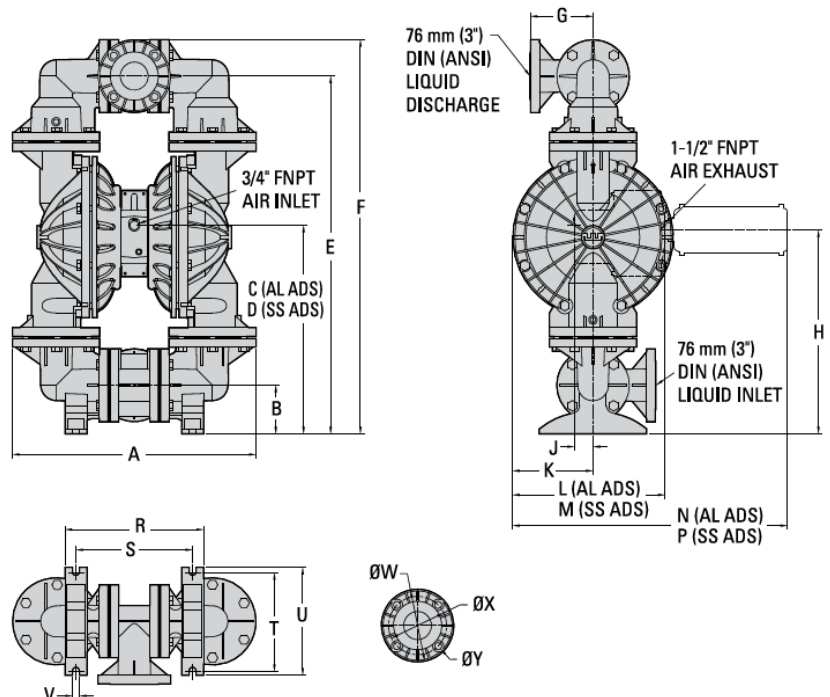

HOLLAND AIR PUMPS BV

De Scheper 260
NL 5688 HP OIRSCHOT
THE NETHERLANDS

PHONE

+31 (0)499 551 000

FAX

+31 (0)499 551 005

VAT

NL8033.13.123.B01

ING-BANK ACC

NL79 INGB 068 29 36 022

ONLINE

WWW.HOLLANDAIRPUMPS.NL
INFO@HOLLANDAIRPUMPS.NL

CHAMBER OF COMMERCE

ROTTERDAM 24.252.831